

BRIDGESTONE

RL


R-LUG

E-3, INDUSTRIAL SERVICE IND-3



The R-LUG bias ply tire offers premium performance due to its standard tread depth and is applicable to a wide range of industrial type machines, especially the slow wearing type such as rubber tired gantry crane (RTG)

RL's regular tread is designed with a specially compounded rubber to resist cutting and wearing, as well as heating.

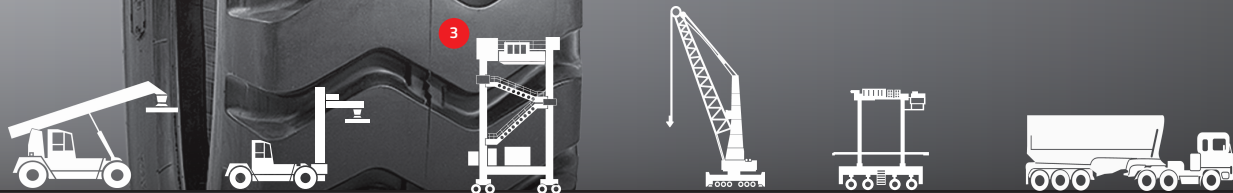

CONTAINER HANDLERS | RUBBER TIERED GANTRY | HARBOR CRANE | STRADDLE CARRIERS | OFF-ROAD-TRUCKS

SPECIALIZED FEATURES

- 1 **NON-DIRECTIONAL PATTERN**
Delivers outstanding performance in both rough terrain and improved surface
- 2 **SPECIAL RUBBER COMPOUNDS**
To resist heat and cut resistance for extended life
- 3 **AVAILABLE FOR INDUSTRIAL SERVICES (PORTS) AND OFF-ROAD TRUCKS**



BRIDGESTONE COMMERCIAL

See your Bridgestone representative for more information.

BS125 - V24 ©Bridgestone Americas Tire Operations LLC. All Rights Reserved.

BRIDGESTONE

Firestone

CATEGORY	SIZE	PLY/STAR RATING	SPEC/ COMPOUND/ CONSTRUCTION	TRA	ARTICLE #	AVG. WT. ^o [LBS]	OTD ^o [32"]	OVERALL DIAMETER ^o [IN]	OVERALL WIDTH ^o [IN]
SMALL TUBE TYPE	12.00-20	18	SCR	E-3	285366	166	32	44.8	12.4
	12.00-20	20	IDU	Industrial Service	009612	418	30	44.8	12.4
	14.00-24	24	IDU	Industrial Service	15841	317	35	53.8	15.2
	14.00-24	28	IDU	Industrial Service	153532	300	35	53.8	15.2
	14.00-24	28	E2A	E-3	296295	310	35	53.8	15.2
SMALL TUBELESS	14.00-24 TG	24	IDU	Industrial Service	153818	333	35	53.5	15.6
	16.00-25	32	IDU	Industrial Service	15842	540	42	58.9	17.5
	21.00-25	40	IDU	Industrial Service	424789	1,015	52	68.9	22.4

SCR: Steel Breaker Cut Resistant

TG: For use on semi drop center rim only; not use on flat base trim

^o Actual specifications may vary depending on the tire produced. Off-road tire limited warranty information is available from your Bridgestone representative or dealer.