

BRIDGESTONE

RL


R-LUG

E-3, INDUSTRIAL SERVICE IND-3



The R-LUG bias ply tire offers premium performance due to its standard tread depth and is applicable to a wide range of industrial type machines, especially the slow wearing type such as rubber tired gantry crane (RTG)

RL's regular tread is designed with a specially compounded rubber to resist cutting and wearing, as well as heating.

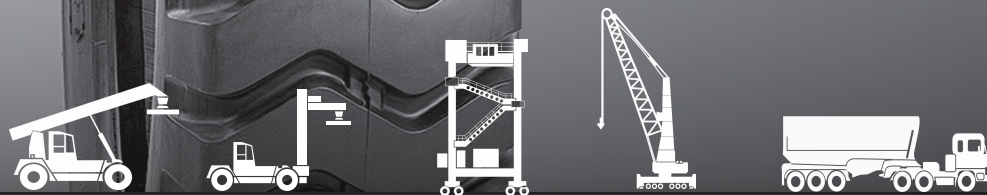

CONTAINER HANDLERS

RUBBER TIRED GANTRY

HARBOR CRANE

OFF-ROAD-TRUCK

SPECIALIZED FEATURES

1 NON-DIRECTIONAL PATTERN

Delivers outstanding performance in both rough terrain and improved surface

2 SPECIAL RUBBER COMPOUNDS

To resist heat and cut resistance for extended life

3 AVAILABLE FOR INDUSTRIAL SERVICES (PORTS) AND OFF-ROAD TRUCKS



BRIDGESTONE COMMERCIAL

See your Bridgestone representative for more information.

BS125 - V23 ©Bridgestone Americas Tire Operations LLC. All Rights Reserved.

BRIDGESTONE

Firestone

| CATEGORY | SIZE | PLY/STAR RATING | SPEC/ COMPOUND/ CONSTRUCTION | TRA | ARTICLE # | AVG. WT. ^o [LBS] | OTD ^o [32"] | OVERALL DIAMETER ^o [IN] | OVERALL WIDTH ^o [IN] |
|-----------------|-------------|-----------------|------------------------------|--------------------|-----------|--------------------------------|---------------------------|---------------------------------------|------------------------------------|
| SMALL TUBE TYPE | 12.00-20 | 18 | SCR | E-3 | 285366 | 166 | 32 | 44.8 | 12.4 |
| | 12.00-20 | 20 | IDU | Industrial Service | 009612 | 418 | 30 | 44.88 | 12.4 |
| | 14.00-24 | 24 | IDU | Industrial Service | 15841 | 317 | 35 | 53.8 | 15.2 |
| | 14.00-24 | 28 | IDU | Industrial Service | 153532 | 300 | 35 | 53.8 | 15.2 |
| | 14.00-24 | 28 | E2A | E-3 | 296295 | 310 | 35 | 53.8 | 15.2 |
| SMALL TUBELESS | 14.00-24 TG | 24 | IDU | Industrial Service | 153818 | 333 | 35 | 53.5 | 15.6 |
| | 16.00-25 | 32 | IDU | Industrial Service | 15842 | 540 | 42 | 58.9 | 17.5 |
| | 21.00-25 | 40 | IDU | Industrial Service | 424789 | 1,015 | 52 | 68.9 | 22.4 |

SCR: Steel Breaker Cut Resistant

TG: For use on semi drop center rim only; not use on flat base trim

^o Actual specifications may vary depending on the tire produced. Off-road tire limited warranty information is available from your Bridgestone representative or dealer.